
Salgado[™] HOP Driver

INSTRUCTIONS FOR USE

Catalog # CR2000 and CR2005

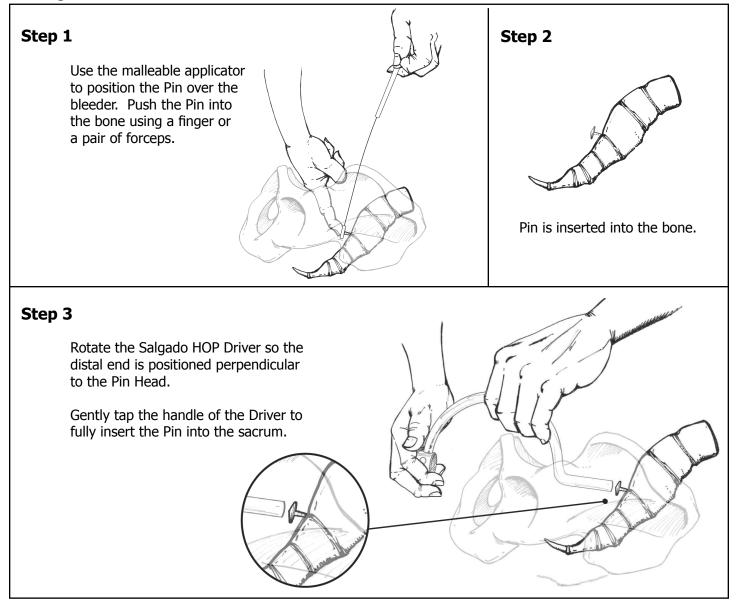

IMPORTANT:

- Salgado HOP Driver is supplied non-sterile and intended for reuse. Do not use any part that appears to be defective.
- Surgin disclaims any and all responsibility and liability concerning the use of this product or any component herein, if it is reused, abused, misused, damaged or used contrary to the instructions contained herein.



37 Shield, Irvine, CA 92618 USA Tel: 816.300.2316 Fax: 816.241.8347 surginhop@mpwus.com www.hemoccluderpin.com EC/REP

Healthlink Europe De Tweeling 20-22, 5215 MC 's Hertogenbosch The Netherlands Tel: +31 (0) 13-5479358 Fax:+31 (0) 73-8080173

CLEANING INSTRUCTIONS

RINSING

Immediately after surgery, rinse instrument under warm (not hot) running water. Rinse should remove all blood, bodily fluids and tissue.

CLEANING

If not done immediately after rinsing, instrument should be submerged in a solution of water and neutral PH (7) detergent.

ULTRASONIC CLEANING

- Instrument should be processed in a cleaner for the full recommended cycle time usually 5 to 10 minutes.
- Place instrument in the ultrasonic cleaner. Instrument has to be fully submerged.
- Do not place dissimilar metals (stainless, copper, chrome plated, etc.) in the same cleaning cycle.
- Change solution frequently at least as often as manufacturer recommends.
- Rinse instrument after ultrasonic cleaning with water to remove ultrasonic cleaning solution.

AUTOMATIC WASHER STERLIZER

Follow manufacturer's recommendations.

MANUAL CLEANING

Most instrument manufacturers recommend ultrasonic cleaning as the best and most effective way to clean surgical instruments. If ultrasonic cleaning is not available, observe the following steps.

- Use stiff plastic cleaning brushes (nylon, etc.).
- Do not use steel wool or wire brushes.
- Use only neutral PH (7) detergents because if not rinsed off properly, low PH detergents will cause breakdown of stainless protective surface and black staining.
- High PH detergent will cause surface deposit of brown stain, which will also interfere with smooth operation of the instrument.
- Make sure all instrument surfaces are visibly clean and free from stains and tissue.
- After scrubbing, rinse instruments thoroughly under running water.

AFTER CLEANING

If instrument is to be stored, let it air dry and store in a clean and dry environment.

STERILIZATION INSTRUCTIONS

Surgin recommends the following AAMI guidelines for steam sterilization.

If sterilized with porous materials:		If sterilized with nonporous materials:	
Standard Cycle Sterilization time: Temperature:	10 minutes 132º C (270º F)	Standard Cycle Sterilization time: Temperature:	3 minutes 132º C (270º F)
Prevacuum Cycle Sterilization time: Temperature:	4 minutes 132º C (270º F)	Prevacuum Cycle Sterilization time: Temperature:	3 minutes 132º C (270º F)